


POWERLITE® C-Cores, are manufactured with iron based Metglas® amorphous alloy 2605SA1. Their unique combination of low loss and high saturation flux density take advanced power conditioning applications to higher performance levels than previously possible with conventional ferromagnetic materials.

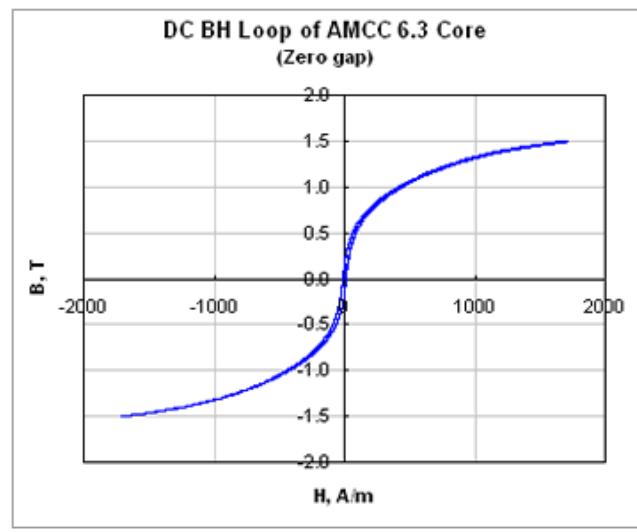

## Applications

For a wide range of high frequencies and hot-spot temperatures (up to Class F), POWERLITE C-Cores are used in a growing list of advanced power conditioning applications including:

- UPS and SMPS Power Factor Correction Chokes
- UPS Harmonic Filter Inductors
- High-Power Outdoor Industrial Ballasts
- Welding Power Supplies
- High-Speed Rail Power Systems

## Benefits

Manufactured in a variety of ultra-efficient core configurations, POWERLITE C-Cores provide significant cost, design and performance benefits over ordinary Si-Fe, ferrite and MPP cores such as:

- High Saturation Flux Density (1.56 T)
- Low Profile – enables weight and volume reductions of up to 50%
- Low Temperature Rise – enabling smaller compact designs
- Low Loss – resulting from micro-thin Metglas ribbon (25 µm)


## Physical Properties METGLAS Alloy 2605SA1

Ribbon Thickness (µm) . . . . .	23
Density (g/cm³) . . . . .	7.18
Thermal Expansion (ppm/°C) . . . . .	7.6
Crystallization Temperature (°C) . . . . .	508
Curie Temperature (°C) . . . . .	399
Continuous Service Temperature (°C) . . . . .	150
Tensile Strength (MN/m²) . . . . .	1k-1.7k
Elastic Modulus (GN/m²) . . . . .	100-110
Vicker's Hardness (50g load) . . . . .	900

## Magnetic Properties METGLAS Powerlite Cores


Saturation Flux Density (T) . . . . .	1.56
Permeability (depending on gap size) . . . . .	VARIABLE
Saturation Magnetostriiction (ppm) . . . . .	27
Electrical Resistivity (µΩ.cm) . . . . .	130

### Core Loss vs. Flux Density† @ 25°C

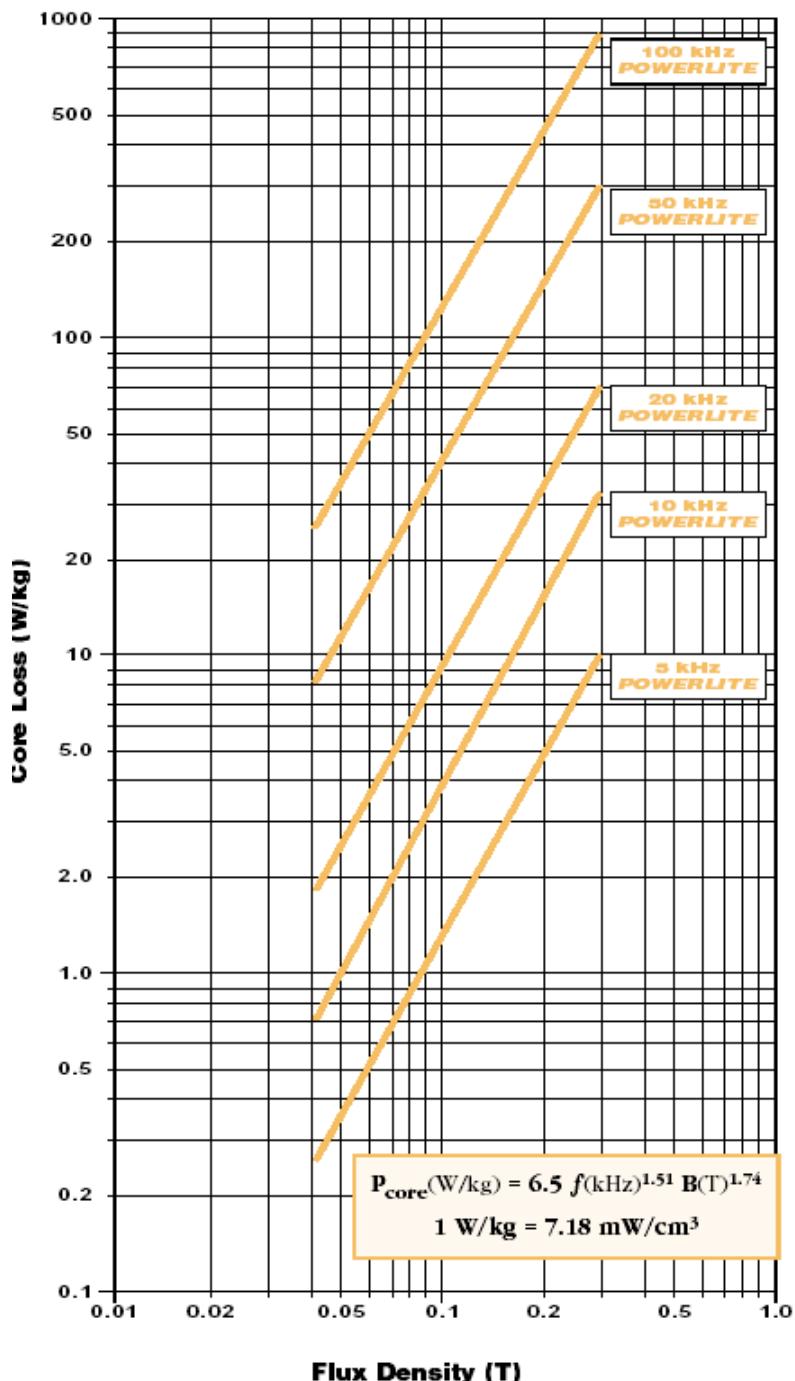


† These curves were determined from ac data; use 1/2 the actual  $B$  to determine core loss for unidirectional applications.

**Saturation Induction vs. Temperature  
POWERLITE<sup>®</sup> C-Cores**

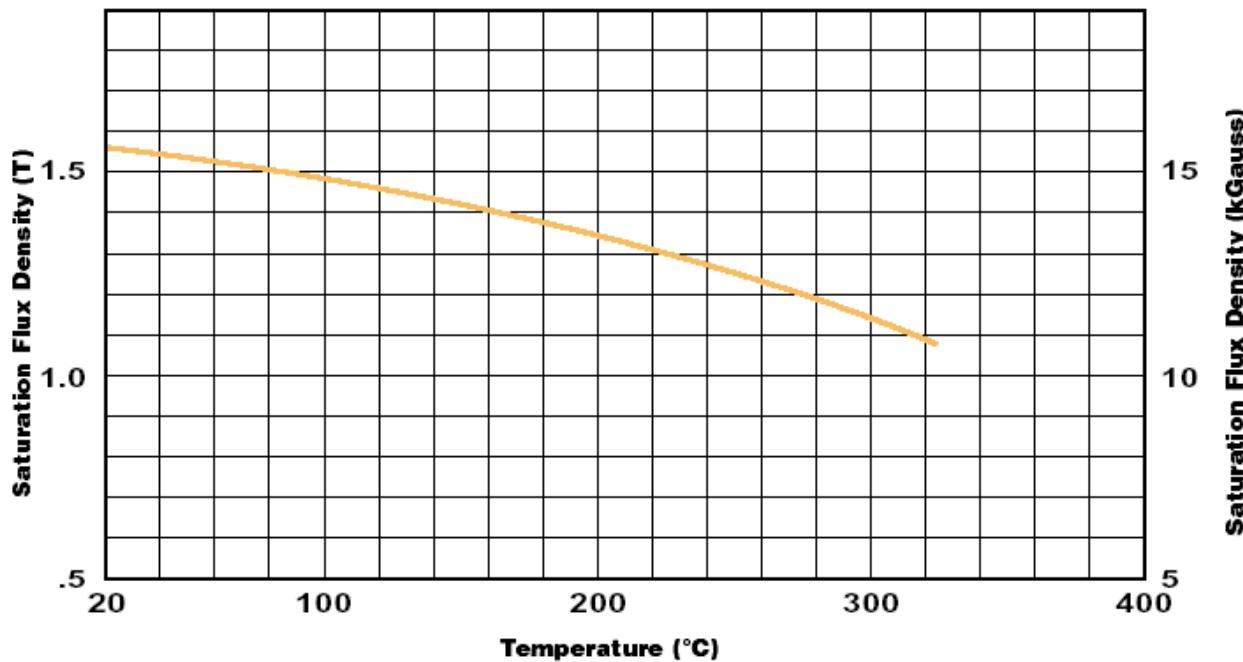


Saturation Flux Density (kGauss)

**Permeability vs. Temperature  
POWERLITE<sup>®</sup> C-Cores**

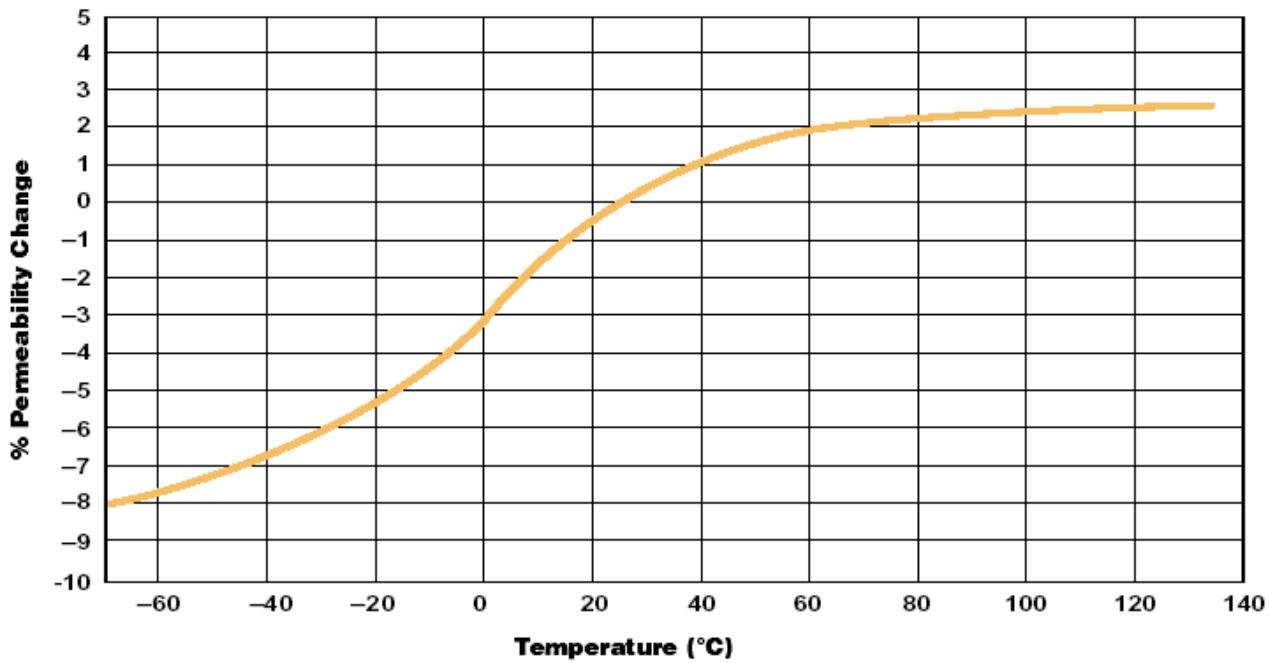

Apr. 2011

## Standard specifications for AMCC series cut cores

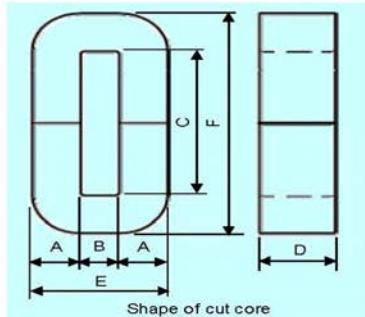

品名コード Product Code	品名 Part Name	A (mm) TYP.	B (mm) TYP.	C (mm) TYP.	D (mm) TYP.	E (mm) TYP.	F (mm) TYP.	L <sub>m</sub> (mm) TYP.	A <sub>e</sub> (mm <sup>2</sup> ) TYP.	Mass (g) TYP.
AMCC0004	AMCC-4	9	10	32.8	15	28	50.8	122	111	99
AMCC06R3	AMCC-6.3	10	11	33	20	31	53	128	164	154
AMCC0008	AMCC-8	11	13	30	20	35	52	130	180	172
AMCC0010	AMCC-10	11	13	40	20	35	62	150	180	198
AMCC016A	AMCC-16A	11	13	40	25	35	62	150	226	248
AMCC016B	AMCC-16B	11	13	50	25	35	72	170	226	281
AMCC0020	AMCC-20	11	13	50	30	35	72	170	271	337
AMCC0025	AMCC-25	13	15	56	25	41	82	194	267	379
AMCC0032	AMCC-32	13	15	56	30	41	82	194	320	454
AMCC0040	AMCC-40	13	15	56	35	41	82	194	373	530
AMCC0050	AMCC-50	16	20	70	25	52	102	244	328	586
AMCC0063	AMCC-63	16	20	70	30	52	102	244	394	703
AMCC0080	AMCC-80	16	20	70	40	52	102	244	525	938
AMCC0100	AMCC-100	16	20	70	45	52	102	244	590	1055
AMCC0125	AMCC-125	19	25	83	35	63	121	292	545	1166
AMCC0160	AMCC-160	19	25	83	40	63	121	292	623	1333
AMCC0200	AMCC-200	19	25	83	50	63	121	292	779	1666
AMCC0250	AMCC-250	19	25	90	60	63	128	306	935	2095
AMCC0320	AMCC-320	22	35	85	50	79	129	328	902	2167
AMCC0400	AMCC-400	22	35	85	65	79	129	328	1173	2817
AMCC0500	AMCC-500	25	40	85	55	90	135	350	1128	2890
AMCC0630	AMCC-630	25	40	85	70	90	135	350	1435	3678
AMCC800A	AMCC-800A	25	40	85	85	90	135	350	1743	4466
AMCC800B	AMCC-800B	30	40	95	85	100	155	390	2091	5972
AMCC1000	AMCC-1000	33	40	105	85	106	171	422	2300	7109

L<sub>m</sub>: Mean magnetic pass length  
A<sub>e</sub>: Effective cross section area