


# C-Core Bobbins

## POWERLITE® C-Cores - Bobbins

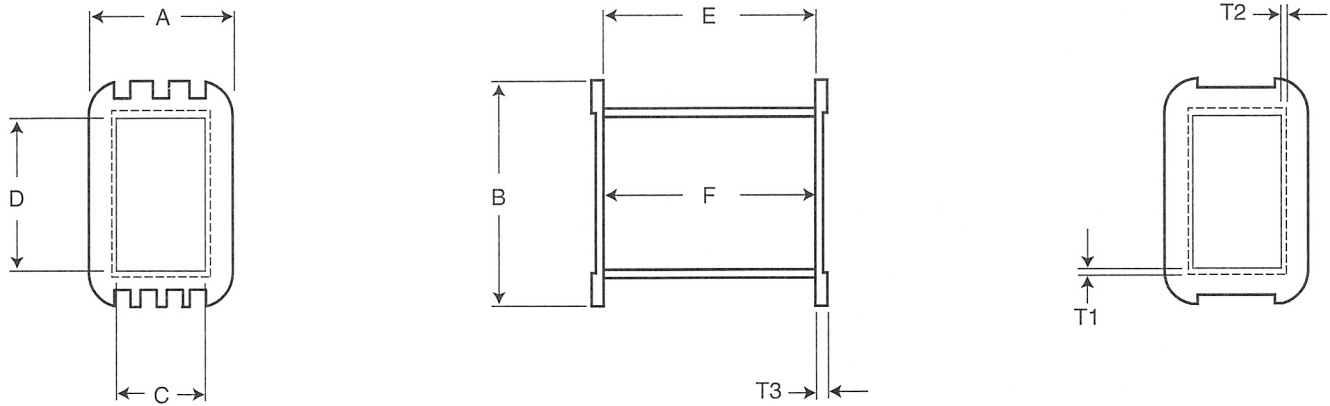

BOBBIN NUMBER	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	T1 (mm)	T2 (mm)	T3 (mm)
AMCC-6.3BOB	21	31.5	11.5	21.5	30	32	1.0	1.0	2.0
AMCC-8BOB	24.5	34	13	21.5	27.5	29.5	1.0	1.0	2.0
AMCC-10BOB	25	34	12	20.5	38	40	1.0	1.0	2.0
AMCC-16ABOB	25	39	12	25.5	38	40	1.0	1.2	2.0
AMCC-16BBOB	25	39	12	25.5	48	50	1.0	1.2	2.0
AMCC-20BOB	25	44	12	30.5	48	50	1.0	1.2	2.0
AMCC-25BOB	27.5	42.5	15.5	26.5	52.5	55	1.0	1.2	2.2
AMCC-32BOB	28	49	14	30.5	53	56	1.2	1.5	2.2
AMCC-40BOB	27.5	55	15.5	38.5	52	54.5	1.0	1.2	2.2
AMCC-50BOB	36	48	17	25.5	67	70	1.5	1.8	2.4
AMCC-63BOB	35	56	18	31.5	66	68	1.2	1.8	2.4
AMCC-80BOB	36	63	17	41	67	70	1.2	1.8	2.4
AMCC-100BOB	35.5	70	18	47	66.5	69.5	1.2	1.8	2.4

## POWERLITE® C-Core Bobbins - Material Properties

**MATERIAL:** Arnite

**FLAMMABILITY RATING:** UL94V0

**TEMPERATURE RATING:** Vical Softening Point = 200°C