


MP1710XDGC

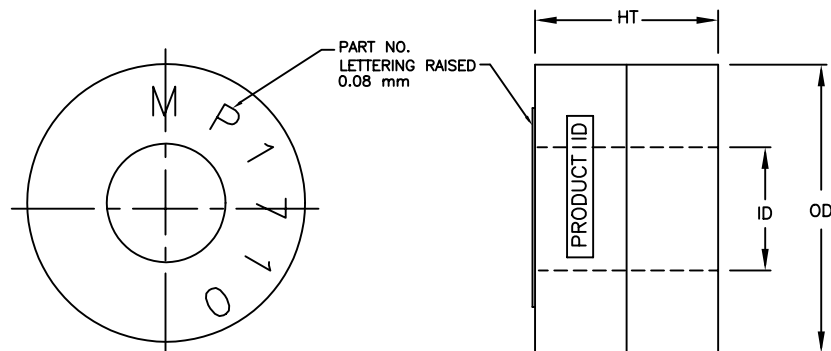

Boxed Core Specifications				Bare Core Specifications		
PART NO.	OD mm	ID mm	HT mm	OD mm	ID mm	HT mm
MP1710XDGC	20.2	10.9	11.4	17.48	12.70	9.53
Tolerance (mm)	±0.6	±0.6	±0.6			

Box Designation (X)	Material DuPont	Manufacturer UL File #	Manufacturer Flammability Rating	Manufacturer Recommended Temperature
P	ZYTEL 70G33L	E41938	HB	120°C
L	ZYTEL FR50	E41938	94 V0	130°C
V	RYNITE FR530L	E69578	94 V0	150°C

NOTE:

- PART IDENTIFICATION CODE AND MANUFACTURING DATE CODE ARE PRINTED ON SURFACES AS SHOWN.
- ALL MEASUREMENTS ARE DONE AT ROOM TEMPERATURE.
- MAXIMUM CONTINUOUS OPERATING TEMPERATURE WILL BE 120°C (IF "P" TYPE BOX USED), 130°C (IF "L" TYPE BOX USED) AND 150°C (IF "V" TYPE BOXED IS USED)

MAGNETIC TOLERANCES:


PERMEABILITY ± 15%

$A_i \pm 15\%$

Mass ± 3%

CORE MATERIAL:

METGLAS® ALLOY 2605SA1.

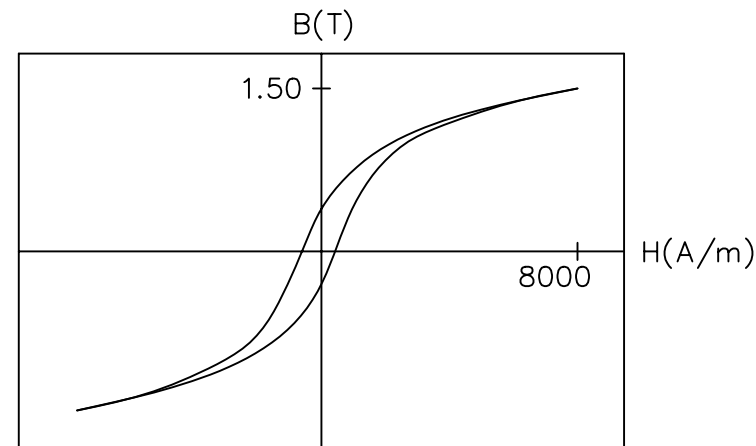

TYPICAL B-H LOOP

Performance Specifications							
l_m	A_c	Mass	Vol	Initial	A_i	W_a	$W_a A_c$
cm	cm ²	g	cm ³	Perm	nH	cm ²	cm ⁴
4.74	0.198	6.73	0.94	245	128.5	0.93	0.184

A_i is measured at 10 kHz/100 mV.

l_m = mean magnetic path length

A_c = net cross-sectional area

W_a = core window area

NOTICE :- THIS DRAWING, THE PROPERTY OF HITACHI METGLAS IS FURNISHED SUBJECT TO RETURN ON DEMAND AND THE CONDITION THAT THE INFORMATION AND TECHNOLOGY EMBODIED HEREIN SHALL NOT BE DISCLOSED OR USED AND THE DRAWING SHALL NOT BE REPRODUCED OR COPIED IN WHOLE OR IN PART EXCEPT AS PREVIOUSLY AUTHORIZED IN WRITING. ANY PERSON WHO MAY RECEIVE OR OBSERVE THIS DESIGN WILL BE HELD STRICTLY LIABLE FOR ANY VIOLATION WHETHER WILLFUL OR NEGLIGENT.	TOLERANCES UNLESS OTHERWISE SPECIFIED		NO.	REVISION	BY	APPR.	DATE	DIMENSIONS	MM	DESCRIPTION	MICROLITE MAGNETIC TOROIDAL CORES		SHEET	PART NO.	REV. NO.
			1.	ADDED NOTE # 3 & COMPANY NAME WAS HONEYWELL	VS	RK	02/10/04	SCALE	N.T.S	MATERIAL	AS NOTED		1 OF 1	MP1710XDGC	1
								PROJECTION	THIRD ANGLE						
								HITACHI METGLAS		SR	07/19/01	SR	07/19/01	RH, RM, ST	07/19/01
										DRAWN	DATE	CHECKED	DATE	APPROVED	DATE