
MP2310MPFC

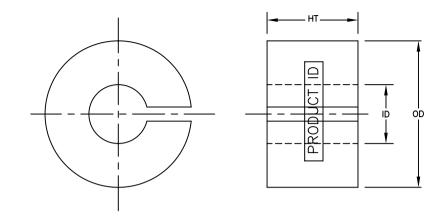

Coated Co	re Spe	cificatio	Bare Core Specifications						
PART NO.	OD mm	ID mm	HT mm	OD mm	ID mm	HT mm			
MP2310MPFC	24.39	12.16	11.05	22.96	12.70	9.53			
Tolerance	max.	min.	max.						

Core	Material	Manufacturer	Insulation
Designation	DuPont	UL File #	System
М	EFB534S0	E206123	ClassB/ClassF


NOTE:

- 1. PART IDENTIFICATION CODE AND MANUFACTURING DATE CODE ARE PRINTED ON CURVED SURFACE.
- 2. MINIMUM COATING THICKNESS OF 0.076 mm (3 MILS) ON ANY POINT OF CORE IS MAINTAINED.
- 3. ALL MEASUREMENTS ARE DONE AT ROOM TEMPERATURE.
- 4. OVALITY OF 95% ON OUTER AND INNER DIAMETER IS PERMISSIBLE.
- 5. MAXIMUM CONTINUOUS OPERATING TEMPERATURE IS 150°c.

MAGNETIC TOLERANCES: PERMEABILITY ± 15% Aı ± 15% Mass \pm 3%

CORE MATERIAL:

METGLAS®ALLOY 2605SA1.

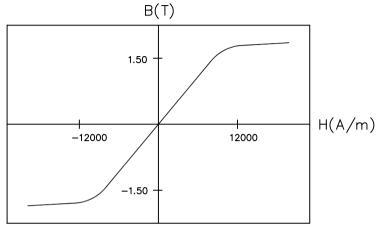

TYPICAL B-H LOOP

Performance Specifications										
Im	Ac	Mass	Volume	Effective	Aı	Wa	WaAc	Core		
cm	cm ²	g	cm ³	Perm	nH	cm ²	cm ⁴	Loss W		
5.60	0.425	17.1	2.38	100	95	1.16	0.494	3.42		

A_I is measured at 10 kHz/100 mV.

 I_m = mean magnetic path length A_c = net cross-sectional area

 W_a = core window area

NOTICE :-	TOLERANCES UNLESS OTHERWISE SPECIFIED	NO	. REVISION	BY	APPR.	DATE	DIMENSIONS	ММ	· ·	POWER FAC		- 1	SHEET	PART NO.	REV. NO.
THIS DRAWING, THE PROPERTY OF HITACHI METGLAS IS FURNISHED SUBJECT TO RETURN ON DEMAND			ADDED NOTE # 5 & DISPLAYED MEANING FOR Im.Ac & Wg.	\ \v_C	DI/	00/40/04	SCALE	N.T.S	MATERIAL	RRECTION	CORE		1 OF 1	MP2310MPFC	1 1
AND THE CONDITION THAT THE INFORMATION AND TECHNOLOGY EMBODIED HEREIN SHALL NOT BE		l ''	COMPANY NAME WAS HONEYWELL.	VS	RK	02/12/04	PROJECTION	THIRD ANGLE	MATERIAL	AS NOTE	ED				
DISCLOSED OR USED AND THE DRAWING SHALL NOT										1			1 '		
BE REPRODUCED OR COPIED IN WHOLE OR IN PART EXCEPT AS PREVIOUSLY AUTHORIZED IN WRITING.							1	HITA	CHI	SD	12/16/02	RK	12/16/0	DM,RM,ST	12/16/02
ANY PERSON WHO MAY RECEIVE OR OBSERVE THIS DESIGN WILL BE HELD STRICTLY LIABLE FOR ANY											-				
VIOLATION WHETHER WILLFUL OR NEGLIGENT.								METG	LAS	DRAWN	DATE	CHECKED	DATE	APPROVED	DATE