
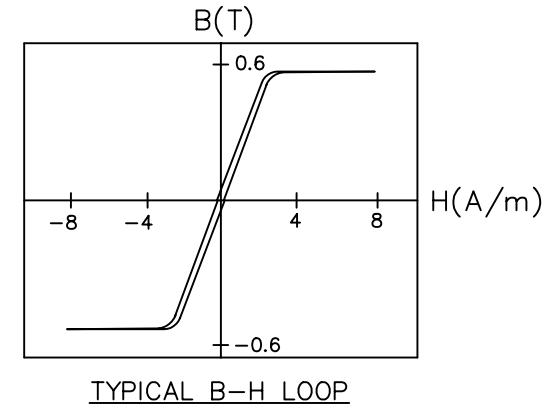


MP2705X4AF

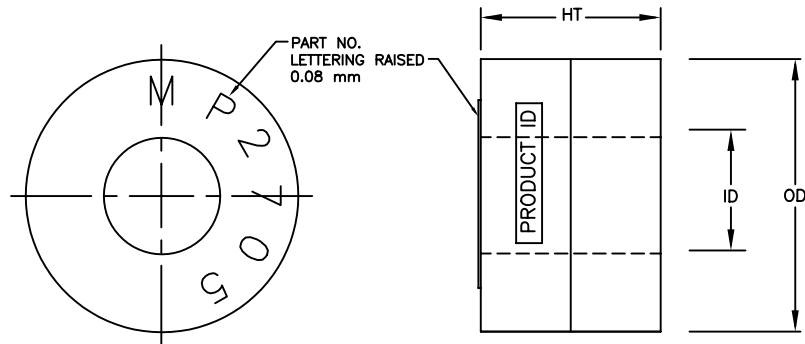

Boxed Core Specifications				Bare Core Specifications		
PART NO.	OD mm	ID mm	HT mm	OD mm	ID mm	HT mm
MP2705X4AF	29.5	14.8	6.7	27.36	16.51	4.76
Tolerance (mm)	±0.3	±0.3	±0.3			

Box Designation (X)	Material DuPont	Manufacturer UL File #	Manufacturer Flammability Rating	Manufacturer Recommended Temperature
P	ZYTEL 70G33L	E41938	HB	120°C
L	ZYTEL FR50	E41938	94 V0	130°C
V	RYNITE FR530L	E69578	94 V0	150°C

Performance Specifications						
l _m	A _c	Mass	Vol	W _a	W _a A _c	A _I
cm	cm ²	g	cm ³	cm ²	cm ⁴	μH
6.89	0.207	10.81	1.42	1.72	0.356	≥ 27.1

A_I is measured at 1 kHz, 2.0 mA/cm.

l_m = mean magnetic path length
A_c = net cross-sectional area
W_a = core window area

NOTE:

- PART IDENTIFICATION CODE AND MANUFACTURING DATE CODE ARE PRINTED ON CURVED SURFACE.
- ALL MEASUREMENTS ARE DONE AT ROOM TEMPERATURE.
- MAXIMUM CONTINUOUS OPERATING TEMPERATURE IS 90°C (IRRESPECTIVE OF TYPE OF BOX USED.)

MAGNETIC TOLERANCES:
PERMEABILITY ≥ 72,000
MASS ± 3%

CORE MATERIAL:
METGLAS[®] ALLOY 2714A.

NOTICE :- THIS DRAWING, THE PROPERTY OF HITACHI METGLAS IS FURNISHED SUBJECT TO RETURN ON DEMAND AND THE CONDITION THAT THE INFORMATION AND TECHNOLOGY EMBODIED HEREIN SHALL NOT BE DISCLOSED OR USED AND THE DRAWING SHALL NOT BE REPRODUCED OR COPIED IN WHOLE OR IN PART EXCEPT AS PREVIOUSLY AUTHORIZED IN WRITING. ANY PERSON WHO MAY RECEIVE OR OBSERVE THIS DESIGN WILL BE HELD STRICTLY LIABLE FOR ANY VIOLATION WHETHER WILLFUL OR NEGLIGENT.	TOLERANCES UNLESS OTHERWISE SPECIFIED		NO.	REVISION		BY	APPR.	DATE	DIMENSIONS	MM	DESCRIPTION MAGNAPERM(FLAT LOOP) MAGNETIC TOROIDAL CORE			SHEET	PART NO.	REV. NO.	
			1.	ADDED TOL. ≥ TO AI		VS	RK	01/30/02	SCALE	N.T.S				1 OF 1	MP2705X4AF	2	
			2.	ADDED NOTE # 3 & COMPANY NAME WAS HONEYWELL.		VS	RK	02/10/04	PROJECTION	THIRD ANGLE	MATERIAL AS NOTED						
									HITACHI METGLAS			SR	07/12/01	SR	07/19/01	RH,RM,ST	07/19/01
												DRAWN	DATE	CHECKED	DATE	APPROVED	DATE