

MP7310MDGC






Coated Cor	e Spec	ificatio	Bare Core Specifications						
PART NO.	OD mm	ID mm	HT mm	OD mm	ID mm	HT mm			
MP7310MDGC	23.49	13.46	7.87	22.02	14.00	6.350			
Tolerance (mm)	Max.	Min.	Max.						


Core	Material	Manufacturer	Insulation
Designation	DuPont	UL File #	System
М	EFB534S0	E206123	

NOTE:

- 1. PART IDENTIFICATION CODE AND MANUFACTURING DATE CODE ARE PRINTED ON CURVED SURFACE.
- MINIMUM COATING THICKNESS OF 0.076 mm (3 MILS) ON ANY POINT OF CORE IS MAINTAINED.
- 3. ALL MEASUREMENTS ARE DONE AT ROOM TEMPERATURE.
- 4. OVALITY OF 95% ON OUTER AND INNER DIAMETER IS PERMISSIBLE.
- 5. MAXIMUM CONTINUOUS OPERATING TEMPERATURE IS 150°c.

MAGNETIC TOLERANCES: PERMEABILITY ± 15% A₁± 15% Mass ± 3% CORE MATERIAL:
METGLAS® ALLOY 2605SA1.



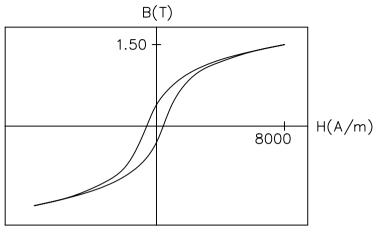

TYPICAL B-H LOOP

Performance Specifications										
Ιm	Ac	Mass	Vol	Initial	Aı	Wa	WaAc			
cm	cm ²	g	cm ³	Perm	nH	cm ²	cm ⁴			
5.66	0.222	9.19	1.25	245	120.7	1.42	0.315			

A_I is measured at 10 kHz/100 mV.

 I_m = mean magnetic path length A_c = net cross—sectional area

 $W_0 = \text{core window area}$

NOTICE :-	TOLERANCES UNLESS OTHERWISE SPECIFIED	NC		BY	APPR.	DATE	DIMENSIONS	ММ		CROLITE MA			SHEET	PART NO.	REV. NO.
THIS DRAWING, THE PROPERTY OF HITACHI METGLAS		1.	ADDED NOTE # 4,5 & MINIMUM COATIG THICKNESS WAS 0.127MM					N.T.S	MATERIAL	TOROIDAL C	ORES		1 OF 1	MP7310MDGC	1
IS FURNISHED SUBJECT TO RETURN ON DEMAND AND THE CONDITION THAT THE INFORMATION AND TECHNOLOGY EMBODIED HEREIN SHALL NOT BE			(5 MILS).COMPANY NAME WAS HONEYWELL.	VS	RK	02/11/04	PROJECTION	THIRD ANGLE	MATERIAL	AS NOT	ED			WIF / STOWN DGC	
DISCLOSED OR USED AND THE DRAWING SHALL NOT												 			r'
EXCEPT AS PREVIOUSLY AUTHORIZED IN WRITING.							HITACHI		SM	10/21/98	SR	07/19,	/01 RH,RM,ST	07/19/01	
ANY PERSON WHO MAY RECEIVE OR OBSERVE THIS DESIGN WILL BE HELD STRICTLY LIABLE FOR ANY							1	METG					1	+	
VIOLATION WHETHER WILLFUL OR NEGLIGENT.							1	MEIG	LAS	DRAWN	DATE	CHECKE	DATE	APPROVED	DATE