

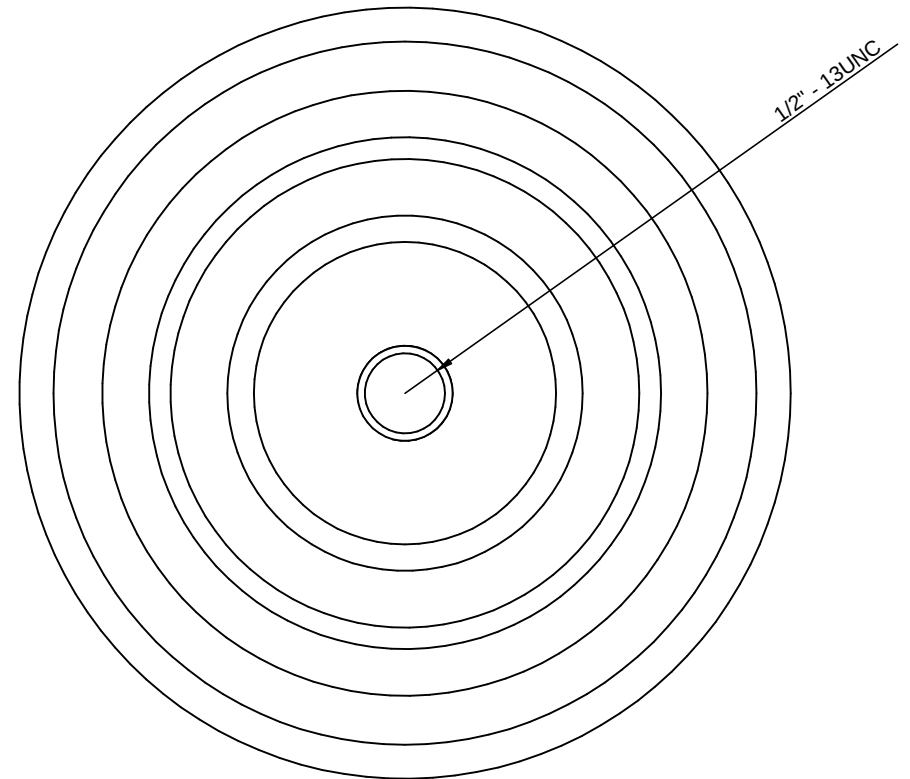


SUPPORT INSULATOR

8.7 kV - 3.925"

STANDARD: ANSI C29.10

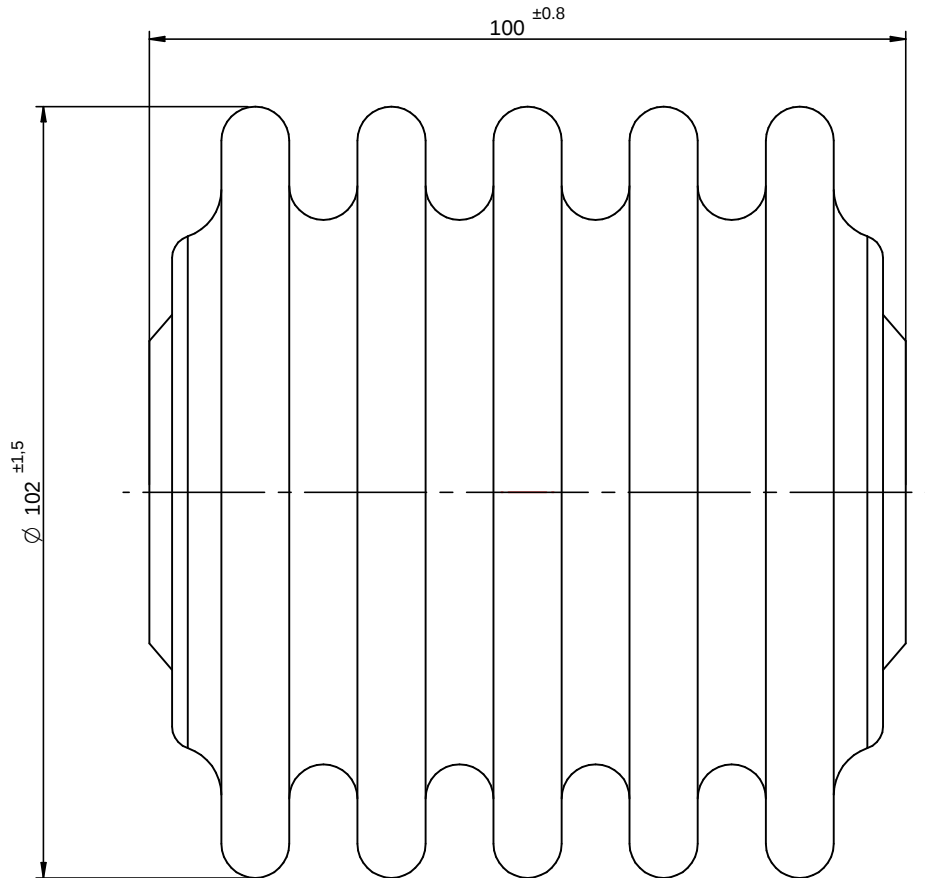

ELECTRICAL CHARACTERISTICS		DIMENSIONAL CHARACTERISTICS		MECHANICAL CHARACTERISTICS		PACKAGIN CHARACTERISTICS	
LOW FREQUENCY WITHSTAND VOLTAGE WET, 60 Hz,	-- kV	DRY ARCING DISTANCE	138 mm	CANTILEVER STRENGTH	3,35 kN	NET WEIGHT PER UNIT	3.016 LBS
LIGHTNING IMPULSE WITHSTAND VOLTAGE	75 kV	LEAKAGE DISTANCE	194 mm	TENSILE STRENGTH	10,5 kN	UNITS PER PACKAGE	--Ps
				COMPRESSION STRENGTH	89,5 kN		