
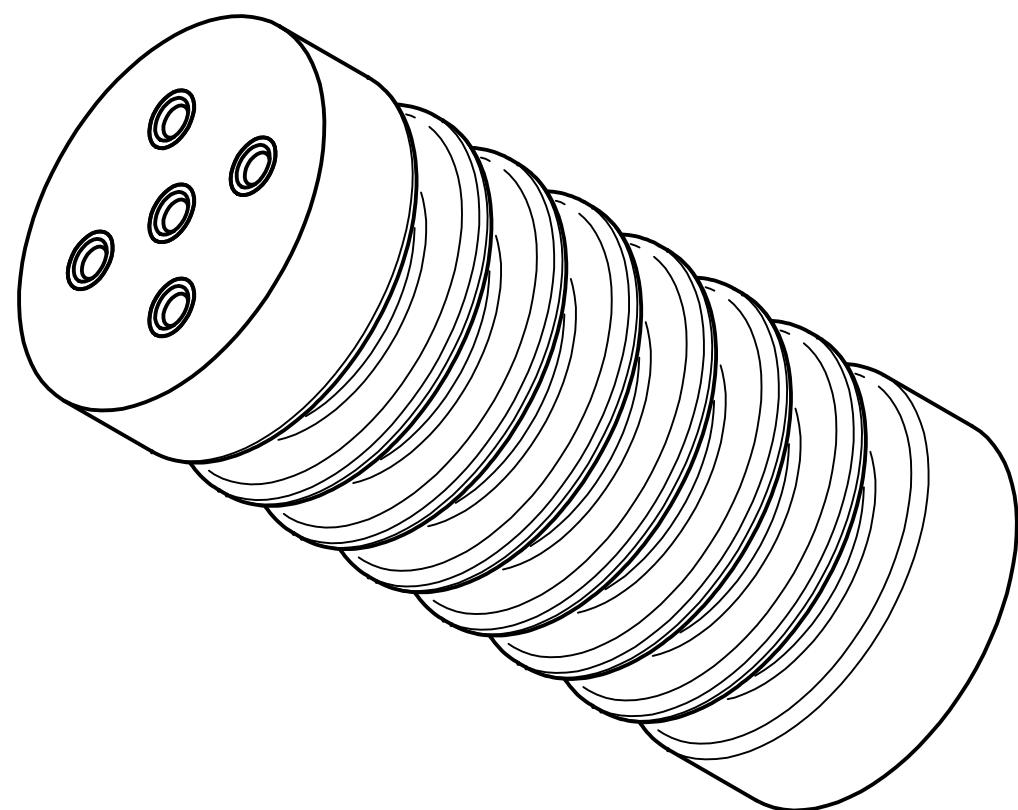


#### NOTE:

1. All Dimensions are in INCHES.
2. All certifications and compliance are considered based on Industry standards ANSI C29.9
3. MATERIAL : CY184
4. CREEPAGE: > 13.7 in
5. RATED VOLTAGE: 25KV
6. Cantilever Strength: 750lbs. (Cantilever values are measured at 2.50" above insulator top surface.)

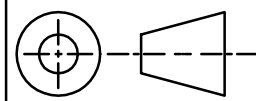

DETAIL A

|   |                     |                    |                |      |  |        |            |        |               |   |  |
|---|---------------------|--------------------|----------------|------|--|--------|------------|--------|---------------|---|--|
|  |                     |                    | THIRD<br>ANGLE |      | THIS DRAWING IS PROPERTY OF<br>NARAYAN EPOXY COMPONENTS<br>PVT.LTD.-PADRA AND UNAUTHORISED<br>USE OF THERE OF BY COPYING ANY<br>PARTY WHATSOEVER IS STRICTLY<br>PROHIBITED |        |            |        |               |   |  |
| STANDARD<br>TOLERANCES<br>UNLESS<br>OTHERWISE<br>SPECIFIED                            | LINEAR<br>DIMENSION | 0.5 UP TO 3        |                | ±0.1 | DRN BY   | CHD BY | DATE       |        |               |   |  |
|   |                     | OVER 3 UP TO 6     |                | ±0.1 | AKD  | C.P.P  | 27.09.2023 | SCALE  |               |   |  |
|   |                     | OVER 6 UP TO 30    |                | ±0.2 |  |        |            | N.T.S. |               |   |  |
|   |                     | OVER 30 UP TO 120  |                | ±0.3 |  |        |            |        |               |   |  |
|   |                     | OVER 120 UP TO 400 |                | ±0.5 |  |        |            |        |               |   |  |
|   | OVER 400 UP TO 1000 |                    | ±0.8           |      |  |        |            |        |               |   |  |
|   | HOLE<br>DIAMETER    | 1 UP TO 6          |                | ±0.1 | TITLE.<br><br>N-025-0348-BAG-105   |        |            |        | DRG NO.       |   |  |
|   |                     | OVER 6 UP TO 12    |                | ±0.1 |  |        |            |        | NEIS-E-25-002 |   |  |
|   |                     | OVER 12            |                | ±0.2 |  |        |            |        |               |   |  |
|   | ANGLES              | DIMENSIONED ± 1°   |                |      |  |        |            |        | REV           | A |  |
| UNDIMENSIONED 90° ± 2°  |                     |                    |                |      |  |        |            |        |               |   |  |