
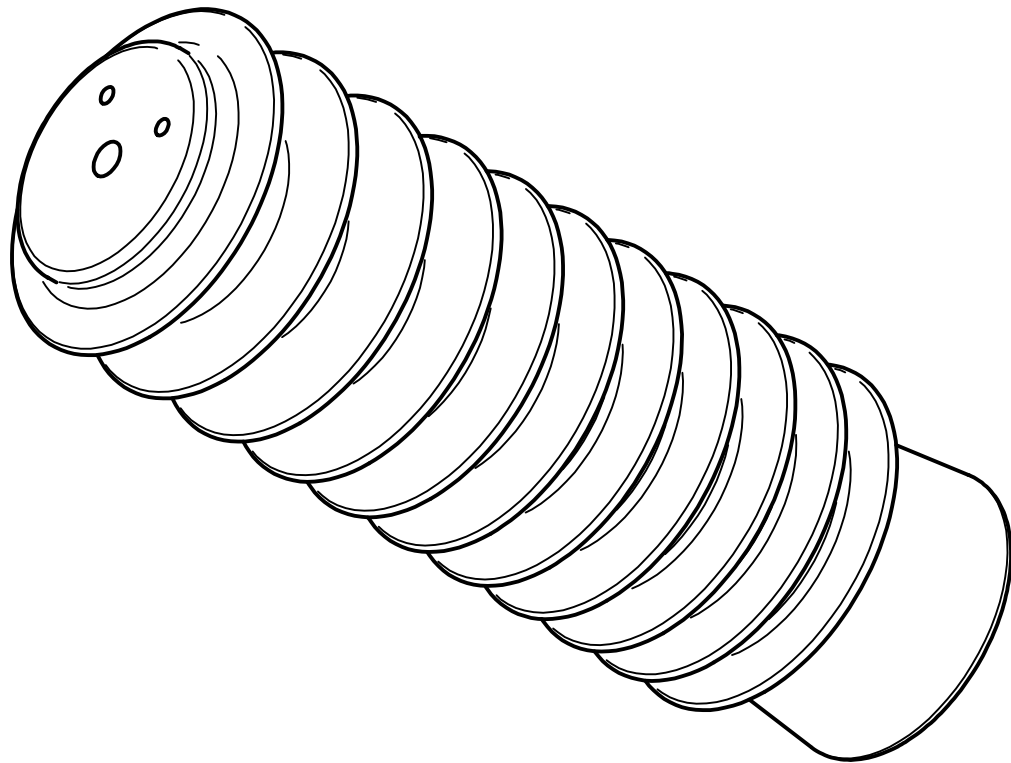
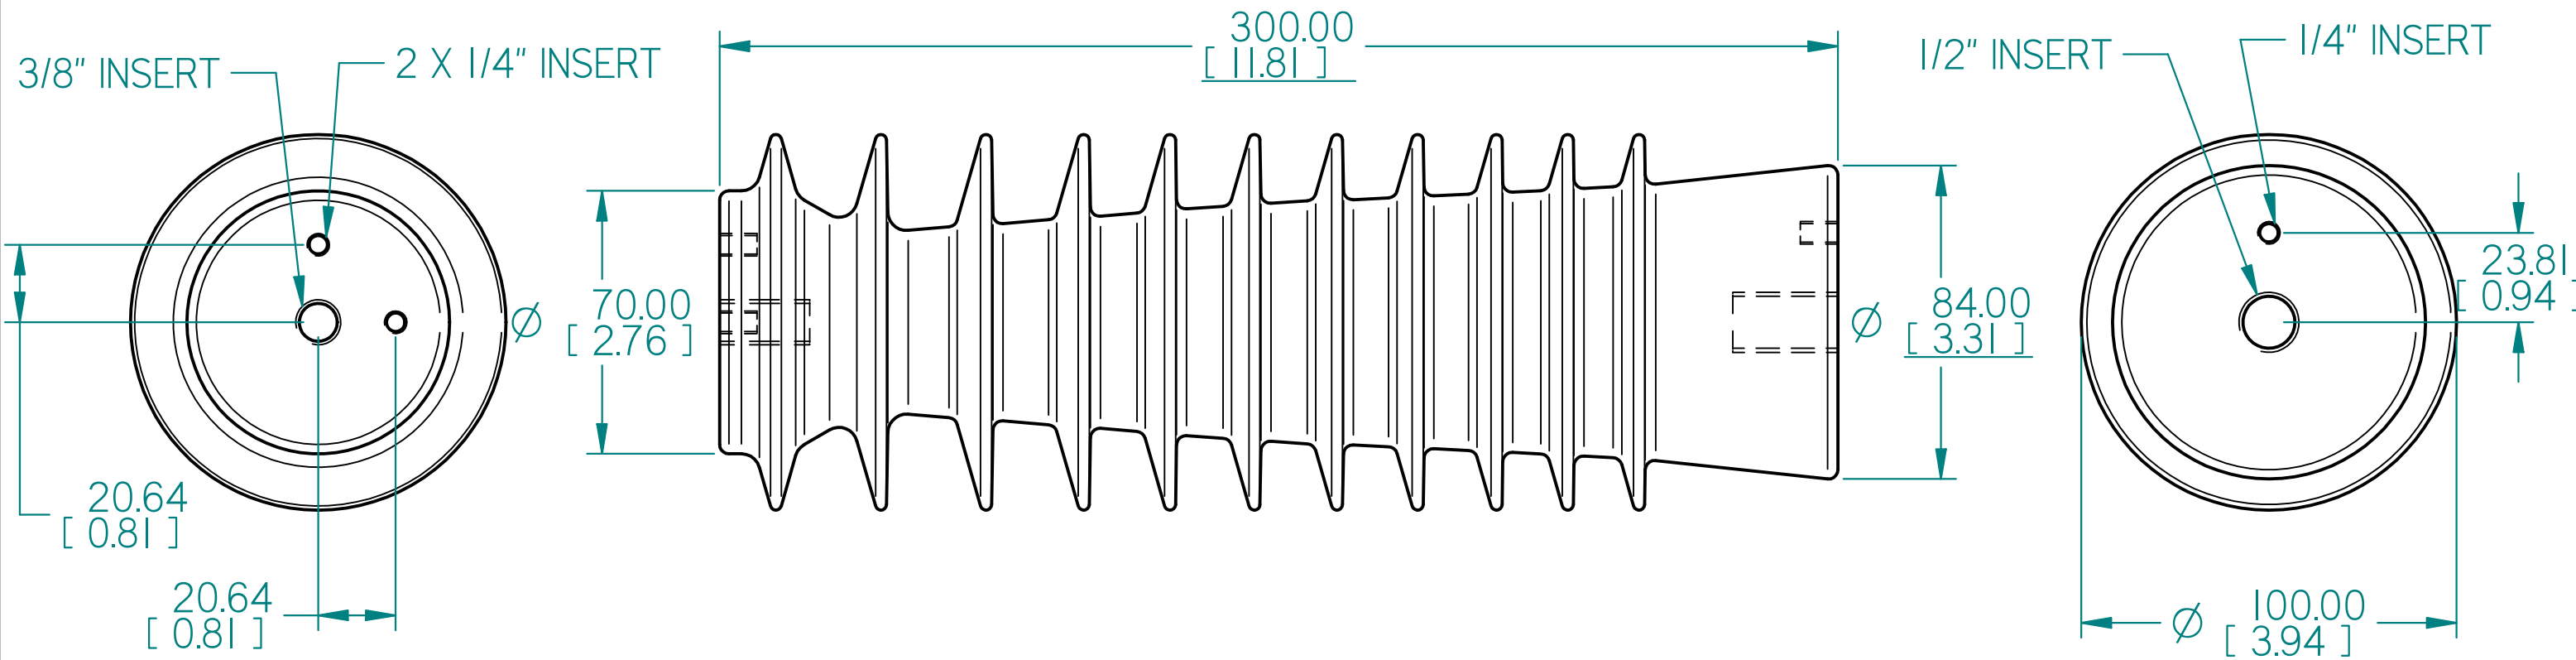




NOTE:

1. ALL DIMENSIONS ARE IN MM/INCHES.
2. RATED VOLTAGE: 36KV
3. LIGHTENING IMPULSE WITHSTAND VOLTAGE : 170KV
4. POWER-FREQUENCY WITHSTAND VOLTAGE: 70KV
5. CREEPAGE: 555mm

			THIRD ANGLE						
STANDARD TOLERANCES UNLESS OTHERWISE SPECIFIED	LINEAR DIMENSION	0.5 UP TO 3	±0.1	DRN BY	CHD BY	DATE			
		OVER 3 UP TO 6	±0.1	AKD	C.P.P	30/11/23	SCALE		
		OVER 6 UP TO 30	±0.2				N.T.S.		
		OVER 30 UP TO 120	±0.3						
		OVER 120 UP TO 400	±0.5						
		OVER 400 UP TO 1000	±0.8						
	HOLE DIAMETER	1 UP TO 6	±0.1	TITLE. N-035-0555-BBB-1C3 35KV SUPPORT INSULATOR				DRG NO.	
		OVER 6 UP TO 12	±0.1					NEIS-33-002	
		OVER 12	±0.2						
	ANGLES	DIMENSIONED ± 1° UNDIMENSIONED 90° ± 2°							REV