


86/200

high elastic

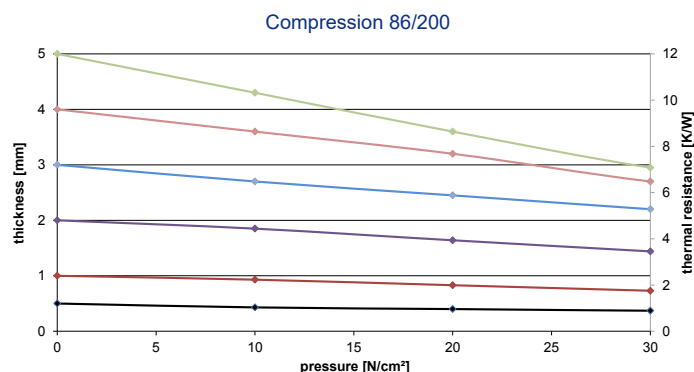

Properties	Unit	86/200
Colour		pink/yellow
Assembly		double layer, carrier film 86/52 in 0.125 mm

Thermal Properties

Thermal resistance R_{th}	K/W	1.2
Thermal impedance R_{ti}	°Cmm²/W	480
	Kin²/W	0.75
Thermal conductivity λ	W/mK	1.0

Electrical Properties

Breakdown voltage $U_{d; ac}$	kV	8.0
Dielectric breakdown $E_{d; ac}$	kV/mm	16.0
Volume resistivity	Ωm	1.0×10^{11}
Dielectric loss factor $\tan \delta$		1.5×10^{-3}
Dielectric constant ϵ_r		3.9

Mechanical Properties

Measured thickness (+/-10%)	mm	0.500
Hardness	Shore 00	10 - 20
Young's modulus	N/cm²	22

Physical Properties

Application temperature	°C	-60 to +200
Density	g/cm³	1.61
Total mass loss (TML)	Ma.-%	< 0.22
Flame rating	UL-94	V-0
Possible thickness	mm	0.5 - 5.0

*KERAFOIL® test according to UL

These high elastic films are characterized by their excellent compressibility with moderate thermal and excellent dielectric behavior. Type 86/200 is constructed in two layers.

✓ Optional available with adhesive coating as **86/200K**

For assistance contact

P: 847-255-4400

F: 847-255-0192

sales@hilltech.com

<http://www.hilltech.com>

Data for engineer guidance only.

Observed performance varies in application.

Engineers are reminded to test the material in application.

At maximum pressure, SOFTTHERM® Films should not be compressed beyond 30% of the original thickness. In case the material should be compressed more than 30%, the SOFTTHERM® material may leak out.

NOTE:

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. The product can have a variety of different applications as well as differing application and working conditions in your environment that are beyond our control. KERAFOL® is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product. All specifications are subject to change without notice. Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded. In case KERAFOL® would be nevertheless held liable, on whatever legal ground, KERAFOL®'s liability will in no event exceed the amount of the concerned delivery. All KERAFOL® products are sold pursuant to the KERAFOL®'s Terms and Conditions of sale and delivery in effect from time to time, a copy of which will be furnished upon request.

10-2019